

TPI Mortar Floor Screed

M400



Remark:

Supposed to use within 2.30hr. after mixing with water (1 bag or 50kg.) / 8 liters. Storage in the dry place with no moisture and seal tightly.

Product Characteristic

Floor screed is a ready mixed mortar suitable for ground leveling giving smooth surface results ready for decoration materials such as tiles, parquet, carpet etc. TPI floor screed M400 makes homogeneous mixture as it contains special chemicals for well our purpose to work easily on ground leveling.

Raw Material


- TPI Portland Type 1 with standard ASTM C - 150 and TIS 15 part 1-2547
- Fine limestone thoroughly dried and properly classied.
- Imported high quality chemicals which improves water absorption, better work ability, adhesion and prevents shrinkage.

How to prepare

- Prepare surface area
- Mix TPI Mortar Floor Screed ready mixed M400 with clean water in ratio 3.5 : 1 (approximately)
- Mix TPI Mortar Floor Screed ready mixed M400 with water until mixture is homogeneous.
- Follow the normal standard procedure of flow screed also able to use with Mortar Machine.

Suggestion

Thickness (mm.)	1 bag / Floor Screed (m2)	Amount of Mortar per square meter (kg)
50	0.56	88

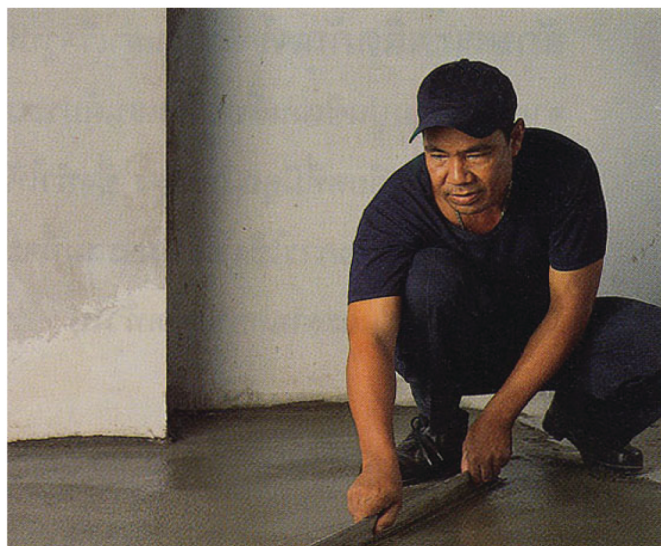

Suitable to floor screed for well leveling on floor and surface.